

SLIK®

CUPBOARD SLIDING DOOR GEAR

FITTING INSTRUCTIONS

Please read all instructions carefully before fitting SLIK Cupboard Door Gear

FOR CUPBOARD DOORS

Max door size 2.4 sqm (8sqft)

Max door thickness 19mm (3/4in)

CONTENTS OF THIS KIT.

1 x length of top channel -

1 x length bottom channel -2 x pull handles

4 x nylon runners - fixing nails.

STEP 1

Make doors to the height of the opening less 12.5mm (1/2"). This system is ideal for use with 17mm chipboard. Cut the tracks to length of the opening as required. Fit the deep channel to the top of the cupboard and the shallow track to the bottom of the cupboard, using the nails provided. Make sure that both the tracks are either flush with the front of the cupboard or set back an equal distance all along their length see fig 2. The track has been pre-drilled along the centre to accommodate the nails.


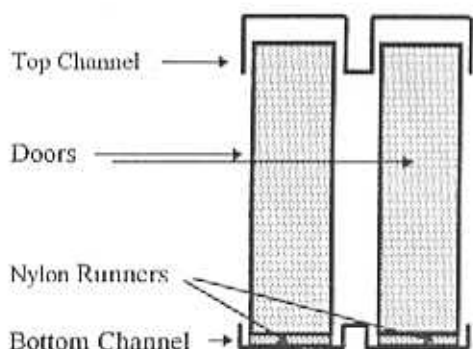


Fig 1

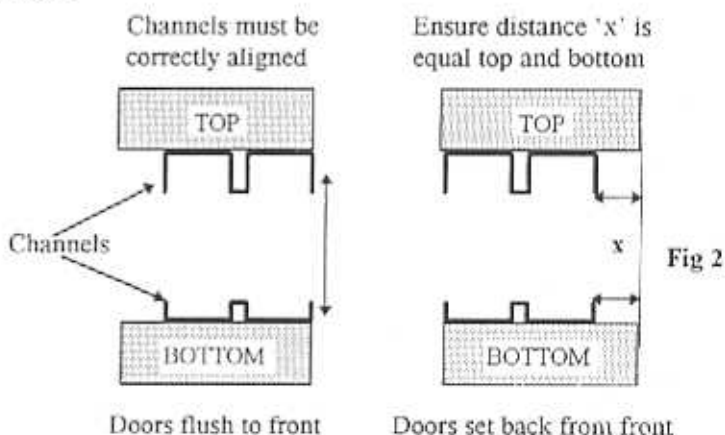

Doors flush to front

Doors set back from front


STEP 2

Nail two nylon runners onto the bottom of each door approximately 25mm (1") from each end, making certain that the nails sink well below the level of the runners. Note that if the doors are over 2mm narrower than the channel width (see diagram fig 3) position the nylon runners so that the front of the doors are flush with the front of the bottom channel.

Fig 3


Where door is more than 2mm narrower than channel.

Offset runner on door

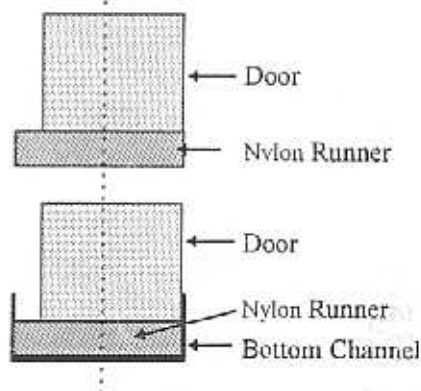


STEP 3

Cut recess in the doors to fit flush fitting handles. Fit doors into opening by tilting the bottom of the door towards you and inserting the top of the door into the top track first. See fig 4.

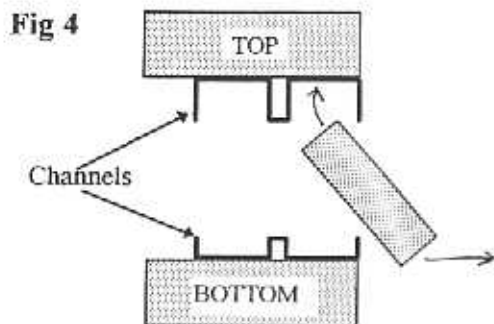

Please note extra fittings are available to fit more than 2 doors (See fig 5), from your stockist.

Fig 5 2 Door Installation

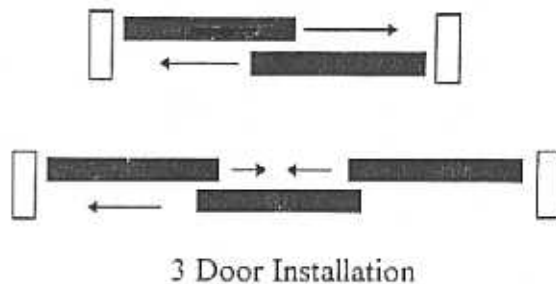

SLIK® SLIDING DOOR GEAR Manufactured by STORMGUARD™

Regency Mill Chester Road Macclesfield Cheshire SK11 8HR

Tel: 01625 613311 / 423085 Fax 01625 614434